

# QuickScan® Mobile

Cordless Handheld Linear Imaging Bar Code Reader



## General Description

Datalogic Scanning's QuickScan Mobile handheld reader is perfect for use at the point-of-sale and this multi-purpose device can also double for inventory, price checking and shelf replenishment activities. The product provides an outstanding return on investment for users seeking a cordless handheld device for general purpose retail and commercial data collection applications.

The QuickScan Mobile reader features Datalogic's cordless STAR-System™, the market's most secure and reliable system for 433/910 MHz narrow band communications. Datalogic's STAR™ radio system is fast, easy to use and guaranteed Wi-Fi interference free. The QuickScan Mobile reader's 12 m / 40 ft radio range capability provides a wide working area eliminating the restraints of cabled devices, making the workplace safer and more efficient.

Solid-state electronics ensure superior reliability and durability versus laser devices and provides for fast and snappy reading performance. Standard multi-interface capability provides host connectivity via USB, RS-232, Keyboard Wedge and Wand emulation. Convenient Plug & Scan kits provide for easy installation and the Scan-While-Charging feature combined with a long lasting user replaceable lithium-Ion battery allows for hands-free reading while simultaneously charging the battery. The Datalogic patented Batch Mode capability allows for the collection of data when out-of-range from the base station.

All of these features combine to provide outstanding bar code reading performance and unmatched reliability. Featuring a 3-year warranty, the QuickScan Mobile reader is the ideal solution for retail and commercial environments where cordless scanning is the key to optimum productivity, lower cost of ownership and a more profitable business.

## Features

- > Datalogic STAR Cordless System™ : Superior 12 m / 40 ft radio range for point-to-point connectivity
- > Excellent reading performance provides outstanding first pass read rates
- > Multi-interface: USB, RS-232, Keyboard Wedge and Wand emulation
- > Solid state design provides a reliable product and durability
- > Long lasting Lithium-Ion battery
- > Scan-While-Charging capability
- > Latch mechanism secures reader in cradle providing for stable mobility
- > Batch mode capability
- > GS1 DataBar™ (RSS) decoding capability

## Applications

- > POS Check-out
- > In-store Operations
- > Office Automation

# QuickScan<sup>®</sup> Mobile

## Specifications

### ELECTRICAL

#### READER:

BATTERY TYPE	1 Lithium-Ion battery 700 mAh
RECHARGE TIME	Max 6 hours
OPERATING AUTONOMY	Typical 20,000 reads

#### CRADLE:

POWER SUPPLY	5 VDC $\pm$ 5%
POWER CONSUMPTION	Max. 4W (charging)
LED INDICATORS	Battery Charging: Red Charge Completed: Green Power/Data: Yellow

### MECHANICAL

#### READER:

WEIGHT (without batteries)	189 g / 6.06 oz
DIMENSIONS	171 x 90 x 68 mm / 6.72 x 3.54 x 2.80 in

#### CRADLE:

WEIGHT	181 g / 3.68 oz
DIMENSIONS	80 x 130 x 90 mm / 3.15 x 5.11 x 3.54 in

### ENVIRONMENT


OPERATING TEMP.	0 ° to 40 °C / 32° to 104° F
STORAGE TEMP.	-20 ° to 70 °C / -4° to 158° F
HUMIDITY	0 to 90% non-condensing
DROP RESISTANCE	Withstands drops from 1.5 m / 4.9 ft to a concrete surface
PROTECTION CLASS	IP30

### PERFORMANCE

SENSOR	CCD Solid State (2088 pixels)
LIGHT SOURCE	LED array
WAVELENGTH	630 - 670 nm
LED SAFETY CLASS	Class 1 EN 60825-1
MAX. RESOLUTION	0.10 mm / 4 mils
PCS MINIMUM	20%
BAR CODES READ	2/5 Family, EAN/UPC, Code 128/EAN 128, Code 93, Codabar, TELEPLEN, PLESSEY, Code 49, Code MSI, Code Delta IBM, Code 11, Code 16K, ISBN/ISSN, ISBT 128, Code 39 (plus Code 32, Cij 39), GS1DataBar™ (RSS)
MAX SCAN RATE	235 scans/sec
READING INDICATORS	LED, beeper
<b>RADIO</b>	
RADIO FREQUENCY	433.92 MHz / 910 MHz
BIT RATE	19,200 baud (433.92 MHz) 36,800 baud (910 MHz)
EFFECTIVE RADIATED POWER	< 10 Mw (433.92 MHz) < 1 Mw (910 MHz)
RANGE (in open air)	Up to 12 m / 40 ft
Restriction of Hazardous Substances:	Complies to EU RoHS

## Reading Diagram

Reading diagram at 25 °C and 300 lux ambient lighting  
Reading Zones (10° skew angle)

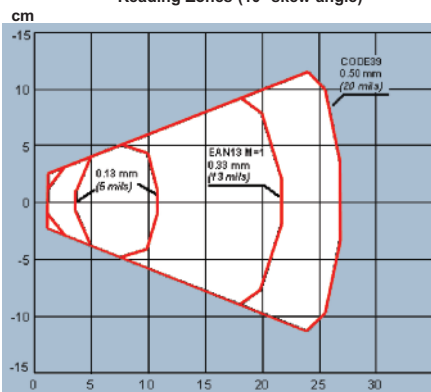

Standard reading area (10° skew angle)



QuickScan Mobile Reader and Cradle



Datalogic Scanning, Inc.  
E-mail us at: [scanning@datalogic.com](mailto:scanning@datalogic.com)  
[www.scanning.datalogic.com](http://www.scanning.datalogic.com)

QuickScan is a registered trademark of Datalogic Scanning, Inc. Datalogic is a registered trademark of Datalogic S.p.A. in many countries and the Datalogic logo, and STAR are trademarks of Datalogic S.p.A. All other brand and product names may be trademarks of their respective owners.

We reserve the right to make modifications and improvements.



R40-0311-UK B 1107